


Brooke™

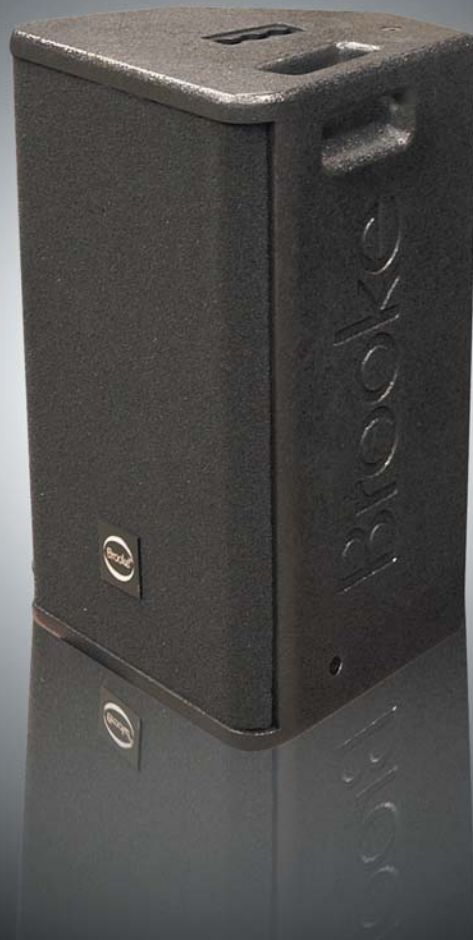

2108XPRO 200w 8"/1" Speaker

Specification

This professional two-way speaker cabinet is purpose-designed to deliver top quality performance and lasting durability in portable applications. An 8" Bass Driver mounts alongside a symmetrically horned 1" Tweeter for superior high fidelity sound at 200 Watts RMS.

Very flat frequency response offers clear and transparent sound for precision monitoring. Steep crossover slopes minimize floor reflections. Perfect for front-stage and near field applications. Dual angle horn placement for dual purpose main or stage monitor.

The unit can sit vertically on the floor, with its integral top-hat on a 35mm pole, or can be used horizontally on the contoured cabinet back. The top face features an integral and ergonomic grab handle for setting up and carrying.

Black PU crackle-finish covers the cabinet and stylish Brooke branding is visible with a prominent logo laser-etched onto the cabinet. The front aspect

Impedance	8Ω
Power	200 Watts RMS
Frequency	60Hz to 18KHz
Sensitivity	95dB
SPL	95dB
Driver(s)	One 8" Bass with one 1" Tweeter
Input Connection(s)	2 x Speakon® type sockets
Mounting	Floor, 35mm top-hat pole
Enclosure	Black 18mm Ply
Dimensions	H 435mm x W 255mm x D 215mm
Weight	12kg

looks superb, with an acoustic foam covered grille magnetically clamped onto the cabinet chassis for easy access. A hidden retaining wire prevents total removal or loss of the grille. The fine detail even extends to a removable rotating front logo on the grille to accommodate vertical or horizontal positioning.

Speakon-type sockets on the rear of the unit ensure compatibility with standard amplifier connections.

Brooke™

brooke-products.com

©2007 Brooke. Errors & Omissions on this User Specification excepted.